



AL828

**SPECIFICATIONS:**

**Job Information**

Project:	Date:
Location:	
Fixture Type:	Cat. #
Lamp:	Volts:
Options & Accessories:	

**DIMENSIONAL DRAWINGS**

**Housing:**

Die-cast aluminum door has four captive stainless steel fasteners and can be removed from the die-cast aluminum housing.

**Lens:**

Clear glass Lens, 1/8" tempered, gasket and silicone Sealed.

**Reflector:**

Segmented anodized specular aluminum reflector.

**Electrical Assembly:**


HID ballast constant wattage auto-transformer high power factor core and coil type, rated -20 degrees Fahrenheit starting temperature. Integrally Mounted in the luminaire and completely prewired. Each ballast assembly is thoroughly tested prior to shipment. Ballast And Electrical Components are "UL" Listed.

**Lamp Socket:**

Porcelain socket pulse rated for HPS, MH & PS lamps. lamp included.

**Finish:**

Attractive dark bronze, white, black polyester powder coated finish for excellent impact, corrosion and UV resistance

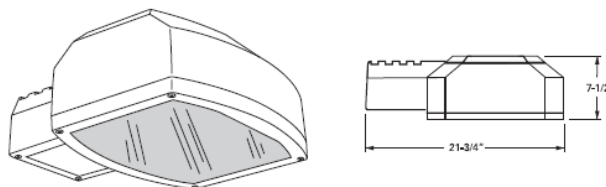

Height	Width	Depth	MH	HPS	EPA	Weight
7.5"	18"	21.75"	400	400	2.3	48 lbs.

**ORDERING INFORMATION:**

Model	Optics	Wattage	Source	Voltage	Mounting	Finish	Options
<ul style="list-style-type: none"> <li>AR828</li> </ul>	<ul style="list-style-type: none"> <li>Type I (T1)</li> <li>Type II (T2)</li> <li>Type III (T3)</li> <li>Type IV (T4)</li> </ul>	100w <ul style="list-style-type: none"> <li>(100)</li> </ul> 150w <ul style="list-style-type: none"> <li>(150)</li> </ul> 175w <ul style="list-style-type: none"> <li>(175)</li> </ul> 250w <ul style="list-style-type: none"> <li>(250)</li> </ul> 320w <ul style="list-style-type: none"> <li>(320)</li> </ul> 400w <ul style="list-style-type: none"> <li>(400)</li> </ul>	High Pressure Sodium <ul style="list-style-type: none"> <li>(HPS)</li> </ul> Metal Halide <ul style="list-style-type: none"> <li>(MH)</li> </ul> Pulse Start Metal halide <ul style="list-style-type: none"> <li>(PS)</li> </ul>	120 Volts <ul style="list-style-type: none"> <li>(120)</li> </ul> 208 Volts <ul style="list-style-type: none"> <li>(208)</li> </ul> 240 Volts <ul style="list-style-type: none"> <li>(240)</li> </ul> 277 Volts <ul style="list-style-type: none"> <li>(277)</li> </ul> 480 Volts <ul style="list-style-type: none"> <li>(480)</li> </ul> Multi-Tap Ballast Factory wired at 277v unless otherwise specified.	Slipfitter <ul style="list-style-type: none"> <li>(SF)</li> </ul> Trunion <ul style="list-style-type: none"> <li>(TR)</li> </ul> Bolt On Arm 6" <ul style="list-style-type: none"> <li>(BOA6)</li> </ul> Bolt On Arm 10" <ul style="list-style-type: none"> <li>(BOA10)</li> </ul>	Bronze <ul style="list-style-type: none"> <li>(BZ)</li> </ul> White <ul style="list-style-type: none"> <li>(WT)</li> </ul> Black <ul style="list-style-type: none"> <li>(BK)</li> </ul> Custom Color <ul style="list-style-type: none"> <li>(CC)</li> </ul> Consult Factory	Photo Cell 120 - 277V <ul style="list-style-type: none"> <li>(PC__)</li> </ul> Glare Shield <ul style="list-style-type: none"> <li>(GS)</li> </ul> Wire Guard <ul style="list-style-type: none"> <li>(WG)</li> </ul> Baffle <ul style="list-style-type: none"> <li>(BA)</li> </ul>

Direct Lighting Sales reserves the right to make modifications or changes to any of its products without prior written notification and without incurring obligation. Actual performance can vary depending on surrounding conditions