



Aerolux

Decorative Architectural Style

Job Information	
Project:	Date:
Location:	
Fixture Type:	Cat. #
Lamp:	Volts:
Options & Accessories:	
DIMENSIONAL DRAWINGS	

SPECIFICATIONS:

Housing:

Die-cast aluminum construction, stainless steel hardware, Full Gasket housing protects from the harshest environment.

Lens & Removable Door Assembly:

Hinged door assembly formed from one piece die-cast corrosion resistant aluminum. The lens is A clear 1/8" tempered flat glass, secured by galvanized lens clips and sealed with silicone gasket To ensure protection from The harshest environment.

Electrical Assembly:


HID ballast constant wattage auto-transformer high power factor core and coil type, rated -20 degrees Fahrenheit starting temperature. Integrally Mounted in the luminaire and completely prewired. Each ballast assembly is thoroughly tested prior to shipment. Ballast and electrical components are "UL" listed.

Lamp Socket:

Porcelain Socket pulse rated for HPS, MH, PS & CFL lamps. Lamp included.

Finish:

Thermoset polyester textured powder coat finish, chemically pretreated through a multi-stage washer, oven baked at 400 Deg. Fahrenheit to insure maximum adherence.

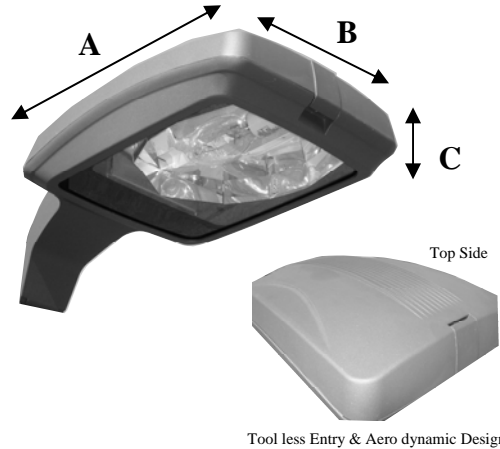

Tool less Entry & Aero dynamic Design

Model #	A	B	C	Max. Watt	LBS.	EPA
ALX-1	23"	14"	5"	175	30	0.8
ALX-2	32"	18"	7"	400	52	1.2

ORDERING INFORMATION:

Model	Optics	Wattage	Source	Voltage	Mounting	Finish	Options
<ul style="list-style-type: none"> ALX-1 ALX-2 	Type II <ul style="list-style-type: none"> (T2) Type III <ul style="list-style-type: none"> (T3) Type IV <ul style="list-style-type: none"> (T4) 	70w <ul style="list-style-type: none"> (70) 100w (100) 150w (150) 175w (175) 250w (250) 400w (400) Compact Fluorescent 26w <ul style="list-style-type: none"> (26) 32w (32) 42w (42) 	High Pressure Sodium <ul style="list-style-type: none"> (HPS) Metal Halide <ul style="list-style-type: none"> (MH) Pulse Start Metal Halide <ul style="list-style-type: none"> (PS) Compact Fluorescent <ul style="list-style-type: none"> (CFL) 	120 Volts <ul style="list-style-type: none"> (120) 208 Volts <ul style="list-style-type: none"> (208) 240 Volts <ul style="list-style-type: none"> (240) 277 Volts <ul style="list-style-type: none"> (277) 480 Volts <ul style="list-style-type: none"> (480) Multi-Tap Ballast Factory wired at 277 volts unless otherwise specified.	Radius Arm <ul style="list-style-type: none"> (RA) 	Texture Bronze <ul style="list-style-type: none"> (BZ) White <ul style="list-style-type: none"> (WT) Black <ul style="list-style-type: none"> (BK) Other colors available Consult Factory	Photo Cell 120w <ul style="list-style-type: none"> (PC12) 208w (PC20) 240w (PC24) 277w (PC27) Round Pole Adaptor <ul style="list-style-type: none"> (RPA) Internal House Side Shield <ul style="list-style-type: none"> (HSS) Wall Plate <ul style="list-style-type: none"> (WP)

Direct Lighting reserves the right to make modifications or changes to any of its products without prior written notification and without incurring obligation. Actual performance can vary depending on surrounding conditions