

# EconoBright 2



## SPECIFICATIONS:

### Housing:

A weather tight unit fabricated from .080" thick aluminum continuous heliarc welded at all seams. Features a .080" ballast plate and a .125" Reinforcing plate for arm attachment, tapped to accept the mounting arm's thru-bolts, so there is no need to open the fixture during mounting.

### Lens:

1/8" thick clear tempered glass bonded to door frame with 100% silicone. Lens frame is hinged and secured with stainless steel fasteners.

### Reflector:

Specular aluminum, available in type I, II, III, IV, V, hydro-form & Segmented light distribution.

### Electrical Assembly:

HID Ballast constant Wattage Auto-Transformer High Power Factor Core and coil Type, Rated -20 Degrees Fahrenheit Staring Temperature. Integrally Mounted in the Luminaire and Completely Prewired. Each Ballast assembly Is Thoroughly Tested Prior To Shipment. Ballast and Electrical components Are "UL" Listed.

### Lamp Socket:

Spring loaded center contact, pulse rated for HPS, MH & PS lamps.

### Arm:

Mounting arm is supplied with two rods and nuts for easy assembly of luminaire to pole.

### Finish:

Chemically pretreated through a multiple stage washer, thermoset polyester textured Powder Coat min. 3 mil. Thickness. Oven baked at 400 degrees Fahrenheit to insure maximum adherence.

## Job Information

Project: \_\_\_\_\_ Date: \_\_\_\_\_


Location: \_\_\_\_\_

Fixture Type: \_\_\_\_\_ Cat. # \_\_\_\_\_

Lamp: \_\_\_\_\_ Volts: \_\_\_\_\_

Options & Accessories: \_\_\_\_\_

## DIMENSIONAL DRAWINGS

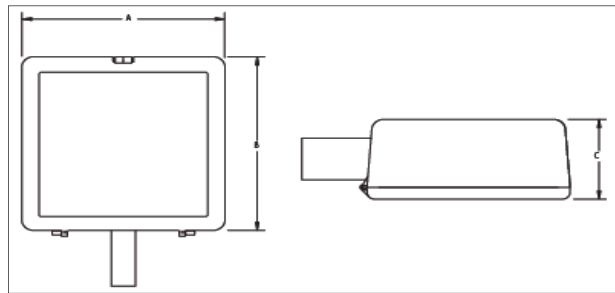

Fixture	A	B	C	Max. Watt	EPA
EBT - 2	16"	16"	8"	400w	1.28

## ORDERING INFORMATION:

Model	Optics	Wattage	Source	Voltage	Mounting	Finish	Options
<ul style="list-style-type: none"> <li>• <b>EBT-2</b> Flat glass</li> </ul>	<u>Hydroformed</u> Type I <ul style="list-style-type: none"> <li>• <b>(HT1)</b> Type II</li> <li>• <b>(HT2)</b> Type III</li> <li>• <b>(HT3)</b></li> </ul> <u>Segmented</u> Type IV <ul style="list-style-type: none"> <li>• <b>(T4)</b></li> </ul> Type V <ul style="list-style-type: none"> <li>• <b>(T5)</b></li> </ul>	150w • <b>(150)</b>  175w • <b>(175)</b>  200w • <b>(200)</b>  250w • <b>(250)</b>  320w • <b>(320)</b>  400w • <b>(400)</b>	High Pressure Sodium <ul style="list-style-type: none"> <li>• <b>(HPS)</b></li> </ul> Metal Halide <ul style="list-style-type: none"> <li>• <b>(MH)</b></li> </ul> Pulse Start Metal Halide <ul style="list-style-type: none"> <li>• <b>(PS)</b></li> </ul>	120 Volts • <b>(120)</b>  208 Volts • <b>(208)</b>  240 Volts • <b>(240)</b>  277 Volts • <b>(277)</b>  480 Volts • <b>(480)</b>  Multi-Tap Ballast factory wired 277 Volts Unless otherwise specified.	Bolt on Arm 6" • <b>(BOA6)</b>  Bolt on Arm 10" • <b>(BOA10)</b>  Adjustable Bolt on Arm • <b>(ABOA14)</b>  Slip Fitter • <b>(SF)</b>  Trunion Mount • <b>(TM)</b>  Ceiling Mount • <b>(CM)</b>  Wall Mount • <b>(WM)</b>	Bronze • <b>(BZ)</b>  Black • <b>(BK)</b>  White • <b>(WH)</b>  Custom Color • <b>(CC)</b>	Photo Cell 120 - 277v • <b>(PC__)</b>  External house side glare shield • <b>(XGS)</b>  Adjustable Fitter • <b>(AF)</b> 2-3/8 Max.

Direct Lighting Sales reserves the right to make modifications or changes to any of its products without prior written notification and without incurring obligation. Actual performance can vary depending on surrounding conditions