

SM019



SPECIFICATIONS:

Housing:

Heavy Die-Cast Aluminum housing with 1/2" threaded holes provided for surface conduit entry or optional photo cell. Door frame is Hinged for easy re-lamping complete with weather proof silicone seal.

Lens:

Clear prismatic borosilicate glass refractor is thermal and shock Resistant.

Reflector:

Optical Quality white powder coat works in tandem with a light-diffusing borosilicate glass lens for optimum light distribution.

Ballast Assembly:

HID Ballast constant Wattage Auto-Transformer High Power Factor Core And coil Type, Rated -20 Degrees Fahrenheit Staring Temperature. Integrally Mounted in the Luminaire and Completely Prewired. Each Ballast Assembly Is Thoroughly Tested Prior To Shipment. Ballast and Electrical Components Are "UL" Listed.

Lamp Socket:

Porcelain Socket pulse rated for HPS, MH & PS lamps. Lamp included.

Finish:

Electro-Static Powder Coat Bronze & White, contact factory for custom colors.

Job Information

Project: _____ Date: _____


Location: _____

Fixture Type: _____ Cat. # _____

Lamp: _____ Volts: _____


Options & Accessories: _____

DIMENSIONAL DRAWINGS

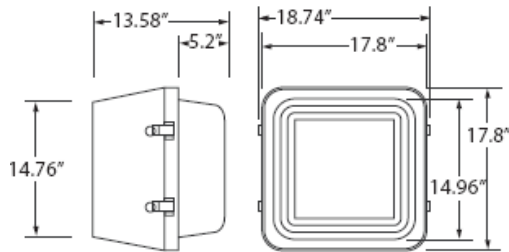

Height	Width	Length	MH	PS	HPS	Weight
13.58"	17.8"	17.8"	400	400	400	18 lbs.

Isolux Curves

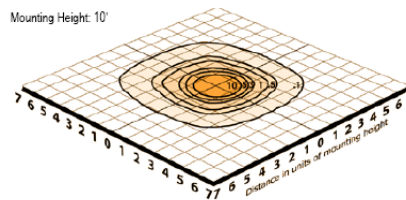

400w MH
@ 10-Ft.
Mounting
Height

ORDERING INFORMATION:

Model	Optics	Wattage	Source	Voltage	Wiring	Finish	Options
<ul style="list-style-type: none"> SM019 	Borosilicate Glass <ul style="list-style-type: none"> (BG) 	175w <ul style="list-style-type: none"> (175) 250w <ul style="list-style-type: none"> (250) 320w <ul style="list-style-type: none"> (320) 400w <ul style="list-style-type: none"> (400) 	High Pressure Sodium <ul style="list-style-type: none"> (HPS) Metal Halide <ul style="list-style-type: none"> (MH) Pulse Start Metal Halide <ul style="list-style-type: none"> (PS) 	120 Volts <ul style="list-style-type: none"> (120) 208 Volts <ul style="list-style-type: none"> (208) 240 Volts <ul style="list-style-type: none"> (240) 277 Volts <ul style="list-style-type: none"> (277) 480 Volts <ul style="list-style-type: none"> (480) Multi-Tap Ballast Factory wired at 277v unless otherwise specified.	Ceiling Mount <ul style="list-style-type: none"> (CM) 	Bronze <ul style="list-style-type: none"> (BZ) White <ul style="list-style-type: none"> (WT) Custom Color <ul style="list-style-type: none"> (CC) Custom color consult with factory	Photo Cell 120 thru 277v <ul style="list-style-type: none"> (PC__) Single Fuse <ul style="list-style-type: none"> (SF) Double Fuse <ul style="list-style-type: none"> (DF) Quartz Re-Strike <ul style="list-style-type: none"> (QR)

Direct Lighting Sales reserves the right to make modifications or changes to any of its products without prior written notification and without incurring obligation. Actual performance can vary depending on surrounding conditions