

# San Gabriel-m



## SPECIFICATIONS:

### Housing:

Corrosion resistant, Weather Tight Unit fabricated from spun Aluminum .080" Thick, Full Gasket Keeps out insects and Water.

### Lens & Removable Door Assembly:

Door Assembly Formed from One Piece spun Aluminum .080" Corrosion Resistant Aluminum With Stainless Steel Fasteners. The Lens is A Clear 1/8" Tempered Flat Glass, Secured By Galvanized Lens Clips and Sealed With Closed Cell Silicone Gasket To Ensure Protection From The Harshest Environment.

### Electrical Assembly:

Electronic ballast Integrally Mounted in the luminaire and completely prewired. Each ballast assembly is thoroughly tested prior to shipment. Ballast And Electrical Components are "UL" Listed.

### Lamp Socket:

CFL socket. Lamp included.

### Finish:


Thermoset Polyester Textured Powder Coat Finish, Chemically Pretreated Through a Multi-Stage Washer, Oven Baked at 400 Deg. Fahrenheit to insure Maximum Adherence.

## Decorative Architectural Style

## Job Information

Project:	Date:
Location:	
Fixture Type:	Cat. #
Lamp:	Volts:
Options & Accessories:	

## DIMENSIONAL DRAWINGS

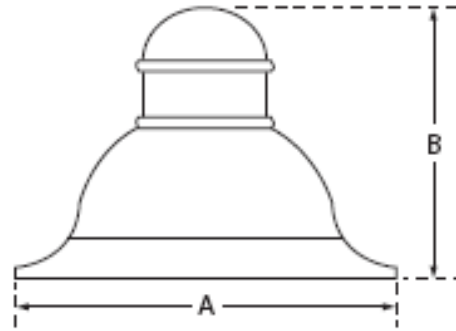

Model #	A	B	Max. Watt	EPA
SGL-M	16"	12"	42	3.2

## ORDERING INFORMATION:

Model	Optics	Wattage	Source	Voltage	Mounting	Finish	Options
<ul style="list-style-type: none"> <li>SGL-M</li> </ul>	Type I <ul style="list-style-type: none"> <li>(T1)</li> </ul> Type II <ul style="list-style-type: none"> <li>(T2)</li> </ul> Type III <ul style="list-style-type: none"> <li>(T3)</li> </ul> Type IV <ul style="list-style-type: none"> <li>(T4)</li> </ul> Type V <ul style="list-style-type: none"> <li>(T5)</li> </ul>	26w <ul style="list-style-type: none"> <li>(26)</li> </ul> 28w <ul style="list-style-type: none"> <li>(28)</li> </ul> 32w <ul style="list-style-type: none"> <li>(32)</li> </ul> 42w <ul style="list-style-type: none"> <li>(42)</li> </ul>	Compact Fluorescent <ul style="list-style-type: none"> <li>(CFL)</li> </ul>	120 Volts <ul style="list-style-type: none"> <li>(120)</li> </ul> 208 Volts <ul style="list-style-type: none"> <li>(208)</li> </ul> 240 Volts <ul style="list-style-type: none"> <li>(240)</li> </ul> 277 Volts <ul style="list-style-type: none"> <li>(277)</li> </ul> Electronic Ballast will recognize any of the above mentioned voltages	Radius Arm <ul style="list-style-type: none"> <li>(RA12)</li> </ul> Wall Mount <ul style="list-style-type: none"> <li>(WM)</li> </ul>	Texture Bronze <ul style="list-style-type: none"> <li>(BZ)</li> </ul> White <ul style="list-style-type: none"> <li>(WT)</li> </ul> Black <ul style="list-style-type: none"> <li>(BK)</li> </ul> Green <ul style="list-style-type: none"> <li>(GN)</li> </ul> Grey <ul style="list-style-type: none"> <li>(GY)</li> </ul> Other colors available Consult Factory	Photo Cell 120 - 277V <ul style="list-style-type: none"> <li>(PC__)</li> </ul> Single Fuse <ul style="list-style-type: none"> <li>(SF)</li> </ul> Double Fuse <ul style="list-style-type: none"> <li>(DF)</li> </ul>

Direct Lighting reserves the right to make modifications or changes to any of its products without prior written notification and without incurring obligation. Actual performance can vary depending on surrounding conditions