

# San Marino



## SPECIFICATIONS:

### Housing:

Die-cast aluminum construction, stainless steel hardware, Full Gasket housing protects from the harshest environment.

### Lens & Door Assembly:

Door assembly formed from one piece die-cast corrosion resistant aluminum. The lens is A clear 1/8" tempered flat glass, secured by galvanized lens clips and sealed with silicone gasket To ensure protection from The harshest environment.

### Electrical Assembly:

HID ballast constant wattage auto-transformer high power factor core and coil type, rated -20 degrees Fahrenheit starting temperature. Integrally Mounted in the luminaire and completely prewired. Each ballast assembly is thoroughly tested prior to shipment. Ballast and electrical components are "UL" listed.

### Lamp Socket:

Socket is a glazed porcelain socket pulse rated for HPS & PS lamps. Lamp included.

### Finish:


Thermoset polyester textured powder coat finish, chemically pretreated through a multi-stage washer, oven baked at 400 Deg. Fahrenheit to insure maximum adherence. Finish is guaranteed for two (2) years.

## Ornamental Style

## Job Information

Project:	Date:
Location:	
Fixture Type:	Cat. #
Lamp:	Volts:
Options & Accessories:	

## DIMENSIONAL DRAWINGS

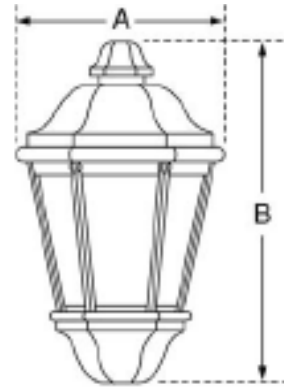

Model #	A	B	Max. Watt	LBS.
SMO-1	15"	29"	250	45

## ORDERING INFORMATION:

Model	Optics	Wattage	Source	Voltage	Mounting	Finish	Options
<ul style="list-style-type: none"> <li>• SMO-1</li> </ul>	Lamp only <ul style="list-style-type: none"> <li>• (LO)</li> </ul> Glass Refractor Type III <ul style="list-style-type: none"> <li>• (T3)</li> </ul> Type V <ul style="list-style-type: none"> <li>• (T5)</li> </ul>	70w <ul style="list-style-type: none"> <li>• (70)</li> </ul> 100w <ul style="list-style-type: none"> <li>• (100)</li> </ul> 150w <ul style="list-style-type: none"> <li>• (150)</li> </ul> 250w <ul style="list-style-type: none"> <li>• (250)</li> </ul>	High Pressure Sodium <ul style="list-style-type: none"> <li>• (HPS)</li> </ul> Pulse Start Metal Halide <ul style="list-style-type: none"> <li>• (PS)</li> </ul>	120 Volts <ul style="list-style-type: none"> <li>• (120)</li> </ul> 208 Volts <ul style="list-style-type: none"> <li>• (208)</li> </ul> 240 Volts <ul style="list-style-type: none"> <li>• (240)</li> </ul> 277 Volts <ul style="list-style-type: none"> <li>• (277)</li> </ul> 480 Volts <ul style="list-style-type: none"> <li>• (480)</li> </ul> Multi-Tap Ballast Factory wired at 277 volts unless otherwise specified.	Post Top Fitter <ul style="list-style-type: none"> <li>• (PTF)</li> </ul> Over 3" O.D. Tenon	Texture Bronze <ul style="list-style-type: none"> <li>• (BZ)</li> </ul> White <ul style="list-style-type: none"> <li>• (WT)</li> </ul> Black <ul style="list-style-type: none"> <li>• (BK)</li> </ul> Other colors available Consult Factory	Photo Cell 120v <ul style="list-style-type: none"> <li>• (PC12)</li> </ul> 208v <ul style="list-style-type: none"> <li>• (PC20)</li> </ul> 240v <ul style="list-style-type: none"> <li>• (PC24)</li> </ul> 277v <ul style="list-style-type: none"> <li>• (PC27)</li> </ul> Clear Lens <ul style="list-style-type: none"> <li>• (CL)</li> </ul> Internal House Side Shield <ul style="list-style-type: none"> <li>• (HSS)</li> </ul>

Direct Lighting reserves the right to make modifications or changes to any of its products without prior written notification and without incurring obligation. Actual performance can vary depending on surrounding conditions