


CB800 Series Bollard

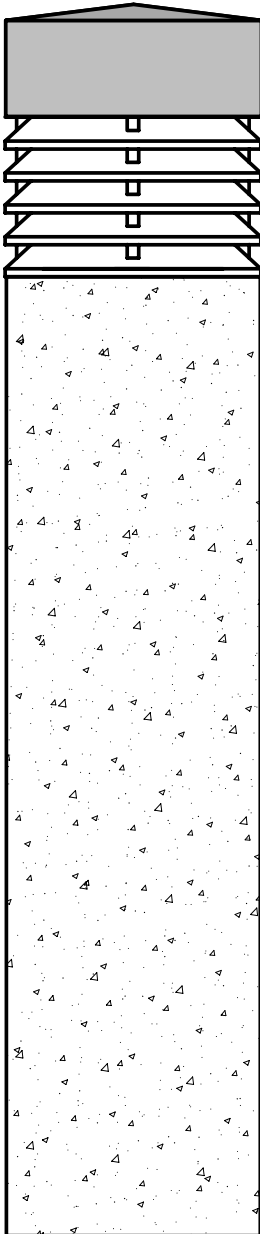

Specifications

Structural

8" Concrete bollard with (5) top cap options and (5) optical choices.

Electrical

Ballast and electrical components are "UL listed", factory pre-wired and mounted to a rigid support for suspension within the concrete base. A quick-disconnect electrical plug will be provided for easy installation and servicing.

Luminaire


Reflector, louvers and refractors shall provide optimum lighting performance and weathertite operation.

Luminaire Finish

Thermoset polyester powder coating is electrostatically applied and baked to form a smooth durable maintenance free finish. Specify; "GY" light grey, "BK" black, "WH" white or "BZ" bronze. Consult factory for other colors.

Anchorage

Anchor base bollards "AB" are supplied with plated anchor bolts for installation into a concrete footing.

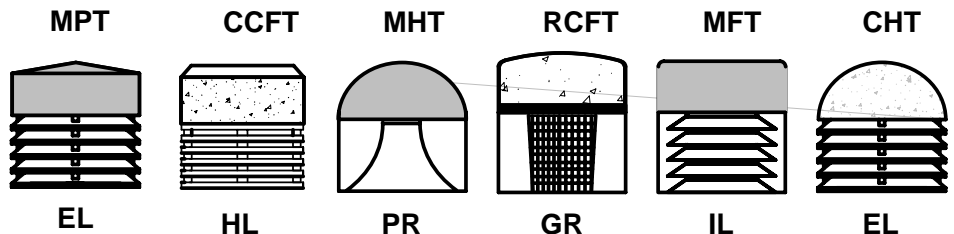

Ordering Guide.....

Example: TCB800-CCFT-HL- 100MH-120-42-AB-BZ-CO-SB-Lamp

Luminaire Series	Shape	Top	Reflector	Watts	Lamp	Volts	Height	Anchor Type	Luminaire Color	Concrete Color	Concrete Finish	Options			
TCB800	SQ Square	MPT	Metal Pointed top	7 thru 150	HPS MH MV FL	120 208 240 277	18" 24" 30" 36" 42"	AB Anchor Base	NA	Brushed Aluminum	N Natural BR Brown WH White BU Buff CO Copper SP Special	MF Mold Finish SB Sandblast EA Exposed Aggregate	HSS = House Side Shield LAMP = Lamp installed PC = Photocell installed RECP = Receptacle SP = Special		
		CCFT	Chamfered Concrete Flat Top						BK	Black					
	RD Round	MHT	Metal Hemi-top						EL	External Louver				WH	White
		MFT	Metal Flat top						IL	Internal Louver				BZ	Dark Bronze
	RD Round	CHT	Concrete Hemi-top						GR	Glass Refractor				SP	Special
		RCFT	Radius Concrete Flat Top												

* Not available with square

**Not available with some concrete tops

CONSULT FACTORY FOR MORE OPTIONS