

VN41



SPECIFICATIONS:

Housing:

Durable corrosion-resistant, die-cast aluminum enclosure with an architectural bronze or white powder coat finish. Enclosure is fully sealed and gasketed, and is wet location listed for outdoor use and includes corrosion-resistant hardware. 1/2" NPT entry point for conduit entry.

Lens:

Vandal-resistant, UV stabilized polycarbonate prismatic refractor.

Reflector:

Internal anodized aluminum reflector which provides ideal light distribution

Ballast Assembly:

High quality electronic high power factor or reactor type ballast, dependant on the lamp type and wattage and 120v or 120 thru 277 volts multi-tap

Lamp Socket:

Glazed porcelain socket pulse rated for 4KV or universal 4 pin socket.


Finish:

Attractive dark bronze or white polyester powder coated finish for excellent impact, corrosion and UV resistance

Job Information


| | |
|------------------------|--------|
| Project: | Date: |
| Location: | |
| Fixture Type: | Cat. # |
| Lamp: | Volts: |
| Options & Accessories: | |

DIMENSIONAL DRAWINGS

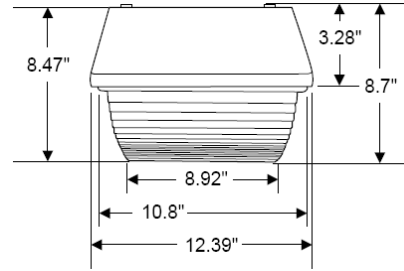

| Height | Width | Length | MH | HPS | CFL | Weight |
|--------|--------|--------|-----|-----|------|--------|
| 8.47" | 12.39" | 12.39" | 150 | 150 | 2x42 | 18lbs. |

Isolux Curves



100 watt
Pulse Start
Metal Halide
Mounting
Height:
10'

ORDERING INFORMATION:

| Model | Optics | Wattage | Source | Voltage | Wiring | Finish | Options |
|--|---|--|---|--|--|--|---|
| <ul style="list-style-type: none"> VN41 | Type V <ul style="list-style-type: none"> (T5) | 26w <ul style="list-style-type: none"> (26) 2x26w <ul style="list-style-type: none"> (2x26) 32w <ul style="list-style-type: none"> (32) 2x32w <ul style="list-style-type: none"> (2x32) 42w <ul style="list-style-type: none"> (42) 2x42w <ul style="list-style-type: none"> (2x42) 70w <ul style="list-style-type: none"> (70) 100w <ul style="list-style-type: none"> (100) 150w <ul style="list-style-type: none"> (150) | HPS <ul style="list-style-type: none"> (HPS) Pulse Start Metal Halide <ul style="list-style-type: none"> (PS) Compact Fluorescent <ul style="list-style-type: none"> (CFL) | 120 Volts <ul style="list-style-type: none"> (120) 208 Volts <ul style="list-style-type: none"> (208) 240 Volts <ul style="list-style-type: none"> (240) 277 Volts <ul style="list-style-type: none"> (277) 480 Volts <ul style="list-style-type: none"> (480) Multi-Tap Ballast Factory wired at 277v unless otherwise specified. | Surface <ul style="list-style-type: none"> (SM) | Bronze <ul style="list-style-type: none"> (BZ) White <ul style="list-style-type: none"> (WT) | Photocell 120v <ul style="list-style-type: none"> (PC120) Photocell 208-277 <ul style="list-style-type: none"> (PC77) Quartz Restrike <ul style="list-style-type: none"> (QR150) |

Direct Lighting Sales reserves the right to make modifications or changes to any of its products without prior written notification and without incurring obligation. Actual performance can vary depending on surrounding conditions