

WP10



SPECIFICATIONS:

Housing:

Die-Cast Aluminum housing with Threaded Side Conduit Access, Photo Cell

Lens:

Prismatic Diffuser Wide Light Distribution

Reflector:

Specular aluminum reflector

Ballast Assembly:

HID Ballast constant Wattage Auto-Transformer High Power Factor Core and coil Type, Rated -20 Degrees Fahrenheit Staring Temperature. Integrally Mounted in the Luminaire and Completely Prewired. Each Ballast Assembly Is Thoroughly Tested Prior To Shipment. Ballast and Electrical Components Are "UL" Listed.

Lamp Socket:

Porcelain Socket pulse rated for HPS & MH lamps. Lamp included.


Finish:

Polycarbonate Bronze & White

Job Information


Project:	Date:
Location:	
Fixture Type:	Cat. #
Lamp:	Volts:
Options & Accessories:	

DIMENSIONAL DRAWINGS

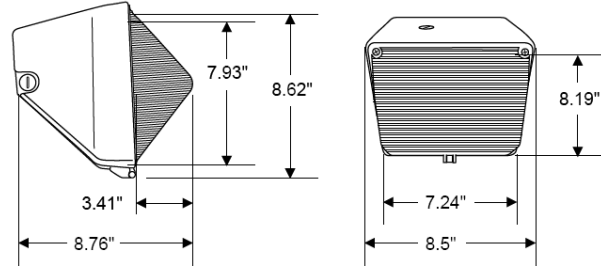

Fixture	Height	Width	Depth	MH	HPS	Weight
WP10	9"	8.5"	8.76"	100w	150w	9lbs.

Isolux Curves

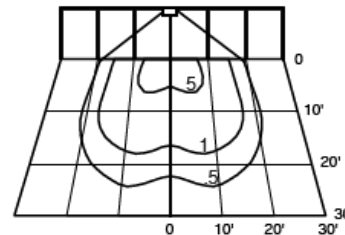

100w HPS
@ 10-Ft.
Mounting
Height

ORDERING INFORMATION:

Model	Optics	Wattage	Source	Voltage	Mounting	Finish	Options
<ul style="list-style-type: none"> WP10 	Polycarbonate Wide <ul style="list-style-type: none"> (PW) 	35w <ul style="list-style-type: none"> (35) 50w <ul style="list-style-type: none"> (50) 70w <ul style="list-style-type: none"> (70) 100w <ul style="list-style-type: none"> (100) Fluorescent 26w <ul style="list-style-type: none"> (26) 32w <ul style="list-style-type: none"> (32) 42w <ul style="list-style-type: none"> (42) 	High Pressure Sodium <ul style="list-style-type: none"> (HPS) Metal Halide <ul style="list-style-type: none"> (MH) CFL <ul style="list-style-type: none"> (FL) 	120 Volts <ul style="list-style-type: none"> (120) 208 Volts <ul style="list-style-type: none"> (208) 240 Volts <ul style="list-style-type: none"> (240) 277 Volts <ul style="list-style-type: none"> (277) Quad-Tap <ul style="list-style-type: none"> (QT) 	Wall Mount <ul style="list-style-type: none"> (WM) 	Bronze <ul style="list-style-type: none"> (BZ) White <ul style="list-style-type: none"> (WT) Custom Color <ul style="list-style-type: none"> (CC) Consult Factory	Photo Cell 120 - 277v <ul style="list-style-type: none"> (PC__)

Direct Lighting Sales reserves the right to make modifications or changes to any of its products without prior written notification and without incurring obligation. Actual performance can vary depending on surrounding conditions