

# WP13



## SPECIFICATIONS:

### Housing:

Die-Cast Aluminum housing with Threaded Conduit Access, optional Photo Cell

### Lens:

Gasketed & Sealed Borosilicate Lens Glass

### Reflector:

Specular aluminum reflector

### Ballast Assembly:

HID Ballast constant Wattage Auto-Transformer High Power Factor Core and coil Type, Rated -20 Degrees Fahrenheit Staring Temperature. Integrally Mounted in the Luminaire and Completely Prewired. Each Ballast Assembly Is Thoroughly Tested Prior To Shipment. Ballast and Electrical Components Are "UL" Listed.

### Lamp Socket:

Porcelain Socket pulse rated for HPS & MH lamps. Lamp included.


### Finish:

Electro-Static Powder Coat Bronze & White

## Job Information


Project:	Date:
Location:	
Fixture Type:	Cat. #
Lamp:	Volts:
Options & Accessories:	

## DIMENSIONAL DRAWINGS

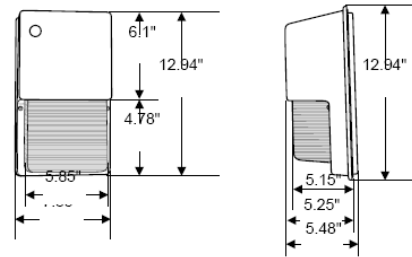

Fixture	Height	Width	Depth	MH	HPS	Weight
WP13	13"	7.85"	5.48"	50-100	50-100	13 lbs.

## Isolux Curves



100w HPS  
@ 10-Ft.  
Mounting  
Height

## ORDERING INFORMATION:

Model	Optics	Wattage	Source	Voltage	Wiring	Finish	Options
<ul style="list-style-type: none"> <li>WP13</li> </ul>	Borosilicate Glass <ul style="list-style-type: none"> <li>(BG)</li> </ul>	50w <ul style="list-style-type: none"> <li>(50)</li> </ul> 70w <ul style="list-style-type: none"> <li>(70)</li> </ul> 100w <ul style="list-style-type: none"> <li>(100)</li> </ul>	High Pressure Sodium <ul style="list-style-type: none"> <li>(HPS)</li> </ul> Metal Halide <ul style="list-style-type: none"> <li>(MH)</li> </ul> Compact Fluorescent <ul style="list-style-type: none"> <li>(CFL)</li> </ul> Consult Factory	120 Volts <ul style="list-style-type: none"> <li>(120)</li> </ul> 208 Volts <ul style="list-style-type: none"> <li>(208)</li> </ul> 240 Volts <ul style="list-style-type: none"> <li>(240)</li> </ul> 277 Volts <ul style="list-style-type: none"> <li>(277)</li> </ul> Multi-tap ballast factory wired at 277v unless otherwise Specified.	Wall Mount <ul style="list-style-type: none"> <li>(WM)</li> </ul>	Bronze <ul style="list-style-type: none"> <li>(BZ)</li> </ul> White <ul style="list-style-type: none"> <li>(WT)</li> </ul>	Photo Cell 120 - 277v <ul style="list-style-type: none"> <li>(PC__)</li> </ul> Wire Guard <ul style="list-style-type: none"> <li>(WG)</li> </ul>

Direct Lighting Sales reserves the right to make modifications or changes to any of its products without prior written notification and without incurring obligation. Actual performance can vary depending on surrounding conditions