

WP14



SPECIFICATIONS:

Housing:

Polycarbonate lens & housing with conduit access, optional photo cell. Door frame is gasketed to withstand the harshest environment

Lens:

Clear prismatic polycarbonate lens is thermal and shock Resistant.

Reflector:

Hammered specular aluminum reflector for optimum light distribution.

Ballast Assembly:

HID Ballast constant Wattage Auto-Transformer High Power Factor Core And coil Type, Rated -20 Degrees Fahrenheit Starting Temperature. Integrally Mounted in the Luminaire and Completely Prewired. Each Ballast Assembly Is Thoroughly Tested Prior To Shipment. Ballast and electrical components are "UL" listed.

Lamp Socket:

Porcelain Socket pulse rated for HPS, MH & PS lamps. Lamp included.


Finish:

Electro-Static Powder Coat Bronze & White, contact factory for custom Colors.

Job Information


Project:	Date:
Location:	
Fixture Type:	Cat. #
Lamp:	Volts:
Options & Accessories:	

DIMENSIONAL DRAWINGS

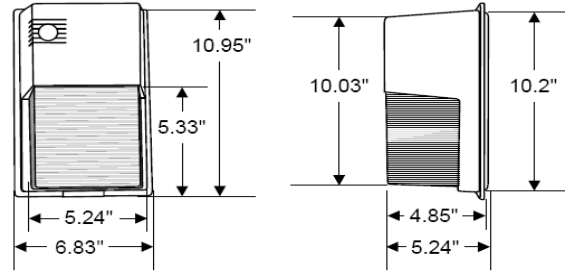

Fixture	Height	Width	Depth	CFL	HPS	Weight
WP14	10.95"	6.83"	5.24"	1x42w	70	6 lbs.

Isolux Curves

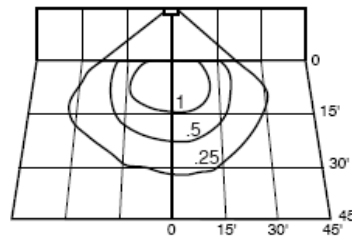

70W HPS
@ 15-Ft.
Mounting
Height

ORDERING INFORMATION:

Model	Optics	Wattage	Source	Voltage	Mounting	Finish	Options
<ul style="list-style-type: none"> WP-14 	Polycarbonate Wide <ul style="list-style-type: none"> (PW) 	HPS 35w <ul style="list-style-type: none"> (35) 50w <ul style="list-style-type: none"> (50) 70w <ul style="list-style-type: none"> (70) Fluorescent 1x26w <ul style="list-style-type: none"> (26) 1x32w <ul style="list-style-type: none"> (132) 1x42 <ul style="list-style-type: none"> (142) 2x13w <ul style="list-style-type: none"> (213) 	HPS <ul style="list-style-type: none"> (HPS) Fluorescent <ul style="list-style-type: none"> (FL) 	120 Volts <ul style="list-style-type: none"> (120) 208 Volts <ul style="list-style-type: none"> (208) 240 Volts <ul style="list-style-type: none"> (240) 277 Volts <ul style="list-style-type: none"> (277) 480 Volts <ul style="list-style-type: none"> (480) Multi-Tap Ballast Factory wired at 277v unless otherwise specified.	Wall Mount <ul style="list-style-type: none"> (WM) 	Bronze <ul style="list-style-type: none"> (BZ) Custom Color (CC) Consult Factory	Photo Cell 120 - 277v <ul style="list-style-type: none"> (PC__)

Direct Lighting Sales reserves the right to make modifications or changes to any of its products without prior written notification and without incurring obligation. Actual performance can vary depending on surrounding conditions