

WP302



SPECIFICATIONS:

Housing:

Die-Cast Aluminum housing with Threaded Side Conduit Access, Photo-Cell, Full Cut off of Light Below The Horizon, Dark Sky Compliant Reduces Light Pollution, Hinged Face Frame.

Lens:

Clear Glass Lens, 1/8" Tempered, Gasket and Silicone Sealed

Reflector:

Specular aluminum reflector

Electrical Assembly:

HID ballast constant wattage auto-transformer high power factor core And coil type, rated -20 degrees Fahrenheit starting temperature. Integrally mounted in the luminaire and completely pre-wired. Each ballast Assembly is thoroughly tested prior to shipment. Ballast and electrical components are "UL" listed.

Lamp Socket:

Porcelain Socket pulse rated for HPS & MH lamps. Lamp included.


Finish:

Thermoset polyester powder coat finish, chemically pretreated through A multi-stage washer, oven baked at 400 degrees Fahrenheit to insure Maximum adherence.

Job Information


Project:	Date:
Location:	
Fixture Type:	Cat. #
Lamp:	Volts:
Options & Accessories:	

DIMENSIONAL DRAWINGS

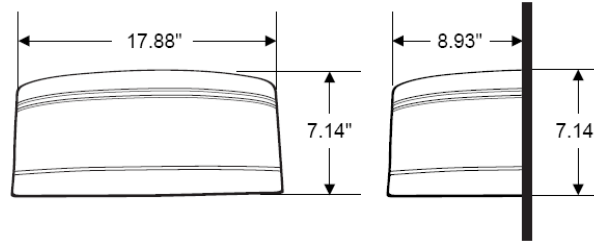

Height	Width	Depth	MH	PS	HPS	Weight
7.14"	17.88"	8.93"	35-175	—	50-150	22 lbs.

Isolux Curves

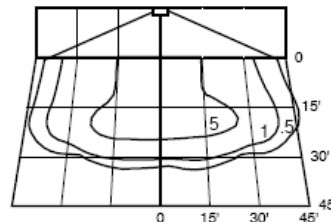

175w MH
@ 15-Ft.
Mounting
Height

ORDERING INFORMATION:

Model	Optics	Wattage	Source	Voltage	Mounting	Finish	Options
<ul style="list-style-type: none"> WP302 	Forward Throw Wide <ul style="list-style-type: none"> (FTW) 	35w <ul style="list-style-type: none"> (35) 50w <ul style="list-style-type: none"> (50) 70w <ul style="list-style-type: none"> (70) 100w <ul style="list-style-type: none"> (100) 150w <ul style="list-style-type: none"> (150) 175w <ul style="list-style-type: none"> (175) 	High Pressure Sodium <ul style="list-style-type: none"> (HPS) Metal Halide <ul style="list-style-type: none"> (MH) 	120 Volts <ul style="list-style-type: none"> (120) 208 Volts <ul style="list-style-type: none"> (208) 240 Volts <ul style="list-style-type: none"> (240) 277 Volts <ul style="list-style-type: none"> (277) 480 Volts <ul style="list-style-type: none"> (480) Multi-Tap Ballast Factory wired at 277v unless otherwise specified.	Wall Mount <ul style="list-style-type: none"> (WM) 	Bronze <ul style="list-style-type: none"> (BZ) White <ul style="list-style-type: none"> (WT) Custom Color <ul style="list-style-type: none"> (CC) Consult Factory	Photo Cell 120 - 277v <ul style="list-style-type: none"> (PC__)

Direct Lighting Sales reserves the right to make modifications or changes to any of its products without prior written notification and without incurring obligation. Actual performance can vary depending on surrounding conditions