

WP303



SPECIFICATIONS:

Housing:

Die-Cast Aluminum housing, Compact Design, Hinged Face Frame, Full Cut Off, Reduces light Pollution, Dark Sky Compliant, Quick Install bracket for Proper Alignment.

Lens:

Tempered 1/8" glass lens, Gasket and Silicone Sealed

Reflector:

Segmented anodized specular aluminum reflector

Electrical Assembly:

HID ballast constant wattage auto-transformer high power factor core and coil type, rated -20 degrees Fahrenheit starting temperature. Integrally Mounted in the luminaire and completely prewired. Each ballast assembly is thoroughly tested prior to shipment. Ballast And Electrical Components are "UL" Listed.

Lamp Socket:

Porcelain Socket pulse rated for HPS & MH lamps. Lamp included.


Finish:

Thermoset polyester textured powder coat finish, chemically pretreated through a multi-stage washer, oven baked at 400 degrees Fahrenheit to insure maximum adherence.

Job Information


| | |
|------------------------|--------|
| Project: | Date: |
| Location: | |
| Fixture Type: | Cat. # |
| Lamp: | Volts: |
| Options & Accessories: | |

DIMENSIONAL DRAWINGS

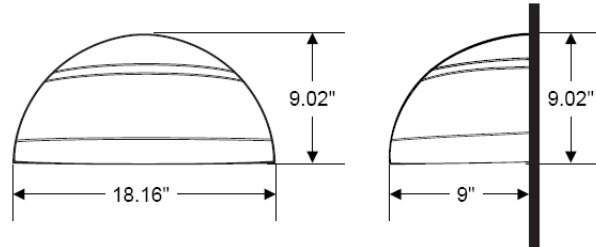

| Height | Width | Depth | MH | PS | HPS | Weight |
|--------|--------|-------|--------|--------|--------|---------|
| 9.02" | 18.16" | 9" | 70-175 | 70-175 | 70-150 | 20 lbs. |

Isolux Curves

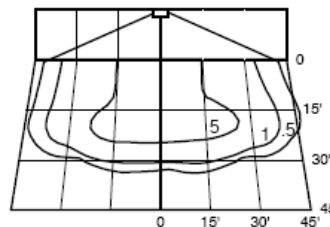

175w MH
@ 15-Ft.
Mounting
Height

ORDERING INFORMATION:

| Model | Optics | Wattage | Source | Voltage | Mounting | Finish | Options |
|---|---|---|--|---|--|---|--|
| <ul style="list-style-type: none"> WP303 | Forward Throw Wide <ul style="list-style-type: none"> (FTW) | 35w <ul style="list-style-type: none"> (35) 50w <ul style="list-style-type: none"> (50) 70w <ul style="list-style-type: none"> (70) 100w <ul style="list-style-type: none"> (100) 150w <ul style="list-style-type: none"> (150) 175w <ul style="list-style-type: none"> (175) 26w <ul style="list-style-type: none"> (26) 32w <ul style="list-style-type: none"> (32) 42w <ul style="list-style-type: none"> (42) | High Pressure Sodium <ul style="list-style-type: none"> (HPS) Metal Halide <ul style="list-style-type: none"> (MH) Pulse start Metal Halide <ul style="list-style-type: none"> (PS) Compact Fluorescent <ul style="list-style-type: none"> (CFL) | 120 Volts <ul style="list-style-type: none"> (120) 208 Volts <ul style="list-style-type: none"> (208) 240 Volts <ul style="list-style-type: none"> (240) 277 Volts <ul style="list-style-type: none"> (277) 480 Volts <ul style="list-style-type: none"> (480) Multi-Tap Ballast Factory wired at 277v unless otherwise specified. | Wall Mount <ul style="list-style-type: none"> (WM) | Bronze <ul style="list-style-type: none"> (BZ) White <ul style="list-style-type: none"> (WT) Black <ul style="list-style-type: none"> (BK) Custom Color <ul style="list-style-type: none"> (CC) Consult Factory | Photo Cell 120 - 277v <ul style="list-style-type: none"> (PC__) Emergency Ballast <ul style="list-style-type: none"> (EB) Emergency Ballast Cold Weather <ul style="list-style-type: none"> (EBCW) |

Direct Lighting Sales reserves the right to make modifications or changes to any of its products without prior written notification and without incurring obligation. Actual performance can vary depending on surrounding conditions