

EconoBright I



SPECIFICATIONS:

Housing:

Heavy gauge die-cast aluminum housing, internally sealed for weather proofing. Silicone is applied between lens frame and housing, fully sealed.

Lens:

1/8" thick clear tempered glass bonded to door frame with 100% silicone. Lens frame is hinged and secured with stainless steel fasteners.

Reflector:

Specular aluminum, available in type I, II, III, IV, V, hydro-form & Segmented light distribution.

Electrical Assembly:

HID Ballast constant Wattage Auto-Transformer High Power Factor Core and coil Type, Rated -20 Degrees Fahrenheit Staring Temperature. Integrally Mounted in the Luminaire and Completely Prewired. Each Ballast assembly Is Thoroughly Tested Prior To Shipment. Ballast and Electrical components Are "UL" Listed.

Lamp Socket:

Spring loaded center contact, pulse rated for HPS, MH & PS lamps.

Arm:

Mounting arm is supplied with two rods and nuts for easy assembly of luminaire to pole.

Finish:

Polyester powder bond coating is standard, other finishes available, contact factory.

Job Information

Project: _____ Date: _____


Location: _____

Fixture Type: _____ Cat. # _____

Lamp: _____ Volts: _____

Options & Accessories: _____

DIMENSIONAL DRAWINGS

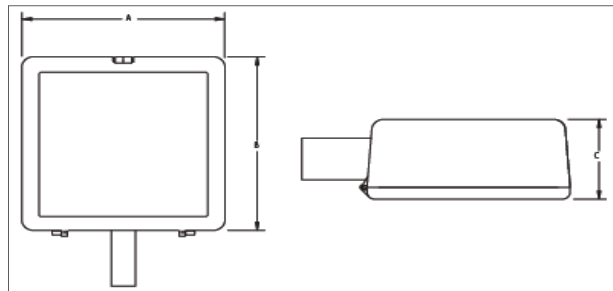

| Fixture | A | B | C | Max. Watt | EPA |
|---------|-----|-----|----|-----------|------|
| EBT - 1 | 17" | 17" | 7" | 400w | 1.28 |

ORDERING INFORMATION:

| Model | Optics | Wattage | Source | Voltage | Mounting | Finish | Options |
|---|---|---|--|--|--|---|--|
| <ul style="list-style-type: none"> • EBT-1 Flat glass | <u>Hydroformed</u> Type I <ul style="list-style-type: none"> • (HT1) • (HT2) Type III <ul style="list-style-type: none"> • (HT3) <u>Segmented</u> Type IV <ul style="list-style-type: none"> • (T4) Type V <ul style="list-style-type: none"> • (T5) | 150w <ul style="list-style-type: none"> • (150) 175w <ul style="list-style-type: none"> • (175) 200w <ul style="list-style-type: none"> • (200) 250w <ul style="list-style-type: none"> • (250) 320w <ul style="list-style-type: none"> • (320) 400w <ul style="list-style-type: none"> • (400) | High Pressure Sodium <ul style="list-style-type: none"> • (HPS) Metal Halide <ul style="list-style-type: none"> • (MH) Pulse Start Metal Halide <ul style="list-style-type: none"> • (PS) | 120 Volts <ul style="list-style-type: none"> • (120) 208 Volts <ul style="list-style-type: none"> • (208) 240 Volts <ul style="list-style-type: none"> • (240) 277 Volts <ul style="list-style-type: none"> • (277) 480 Volts <ul style="list-style-type: none"> • (480) Multi-Tap Ballast factory wired 277 Volts Unless otherwise specified. | Bolt on Arm 6" <ul style="list-style-type: none"> • (BOA6) Bolt on Arm 10" <ul style="list-style-type: none"> • (BOA10) Adjustable Bolt on Arm <ul style="list-style-type: none"> • (ABOA14) <ul style="list-style-type: none"> • Slip Fitter • (SF) Trunion Mount <ul style="list-style-type: none"> • (TM) Ceiling Mount <ul style="list-style-type: none"> • (CM) | Bronze <ul style="list-style-type: none"> • (BZ) Black <ul style="list-style-type: none"> • (BK) White <ul style="list-style-type: none"> • (WH) Custom Color <ul style="list-style-type: none"> • (CC) | Photo Cell 120 - 277v <ul style="list-style-type: none"> • (PC__) External house side glare shield <ul style="list-style-type: none"> • (XGS) Adjustable Fitter <ul style="list-style-type: none"> • (AF) 2-3/8 Max. Wall Mount <ul style="list-style-type: none"> • (WM)* *Wall Plate to be ordered separately |

Direct Lighting Sales reserves the right to make modifications or changes to any of its products without prior written notification and without incurring obligation. Actual performance can vary depending on surrounding conditions